


Company Datasheet #	NR3620-HS
Revision #:	B
Date:	110520

# NR3620-HS

## High Stability 10MHz Single Channel GNSS Locked Reference

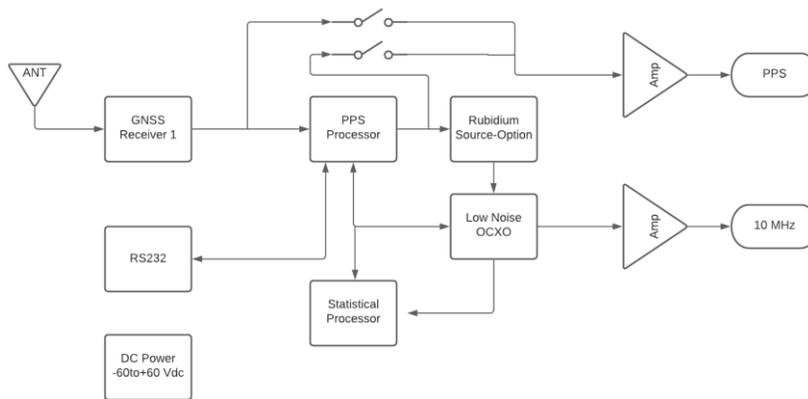

### Standard Phase Noise

Offset Frequency (Hz)	Typical (dBc / Hz)
10	-120
100	-145
1K	-145
10k	-150

### High Stability

Allan deviation E-12  
PPS Jitter < 5ns @ 1 sigma

Single Channel GNSS locked reference featuring high stability. The unit also features a PPS source with a standard deviation of under 5 ns. Pulse to pulse jitter is well under 200ps. In addition to output amplitudes and internal critical measurements, the unit reports a continuous calculation of Allan Deviation. Various phase noise options are available. requirements. Operates from -60 to +60 Vdc in three ranges.

## *Technical Specifications*

Output	10 MHz, 1.0 Vrms $\pm 0.2$ , into 50 Ohms, Sine
Harmonic Distortion	< -30 dBc
First Year Freq Stability	$\pm 50$ ppb (unlocked)
Temperature Stability	$\pm 10$ ppb unlocked
Daily Aging OCXO	$\pm 5$ ppb/day unlocked
Yearly Aging	$\pm 50$ ppb unlocked
<b>PPS</b>	
Amplitude for 1PPS	3.3 Vdc CMOS (5 Vdc option) $\pm 100$ ma
Pulse width for 1PPS	Programmable 1 to 500ms in 1 ms steps
Rise time for 1PPS	<5 ns
Jitter	GNSS-PPS 1 sigma of 5 ns (requires dual band antenna)
Connector	BNC
Load Impedance	50 Ohm
Location	rear
Typical Allan Deviation	
1	4E-12
10	4E-12
100	2E-11
1000	2E-12
Standard Phase Noise	
1 Hz	-100
10 Hz	-130
100 Hz	-150
1000 Hz	-150
<b>Remote interface &amp; control</b>	
Protocol	RS232 NMEA-0183
Connector	DB-9
Location	Rear panel
Protocol	Bit plus stop
Standard Baud Rates	Selectable 9600, 19200, 38400, 57600 or 115200 bps

Company Datasheet #	NR3620-HS
Revision #:	B
Date:	110520

<b>GNSS receiver</b>	GPS, BeiDou, Galileo, and GLONASS reception
Cold Start Acquisition	< 30 seconds
<b>Sensitivity</b>	
Tracking	-167 dBm
Reacquisition	-160 dBm
Cold Start	-148 dBm
Hot Start	-157 dBm
<b>Signals Supported</b>	
GPS	L1C/A (1575.42 MHz), L2C (1227.60 MHz)
GLONASS	L1OF (1602 MHz + k*562.5 kHz, k = -7,..., 5, 6), L2OF (1246 MHz + k*437.5 kHz, k = -7,..., 5, 6)
Galileo	E1-B/C (1575.42 MHz), E5b (1207.140 MHz)
BeiDou	B1I (1561.098 MHz), B2I (1207.140 MHz)
<b>Antenna with LNA</b>	
Antenna power	3.5 Vdc, < 20 ma (on center conductor) (factory configurable to 5 Vdc)
Frequency	1574-1607 MHz, 1197-1249 MHz (Dual band antenna required)
Nominal Gain	2 dBic
Amplifier gain	26 dB
Noise Figure	< 2.0 dB
Out of Band rejection	Fo±50MHz=60 dBc, Fo±60 MHz
DC current	<25 ma@3.5 Vdc

### Environmental and Mechanical

Operating Temperature	0 to 50°C non-condensing (extended temperature range available)
Storage Temperature	-40 to 70°C
Width	4.0" (exclusive of connectors)
Depth	5.0"
Height	1.5"
Weight	~16 oz.

This document is copyright © June 30, 2022 Novus Power Products LLC. All rights reserved. This document is provided for information purposes only; contents are subject to change without notice. It is not warranted to be error-free, nor subject to any other warranties or conditions including implied warranties and conditions of merchantability or fitness for a particular purpose.