


ND2310D-IRIG

10 Channel Distribution Amplifier

Networking Capability

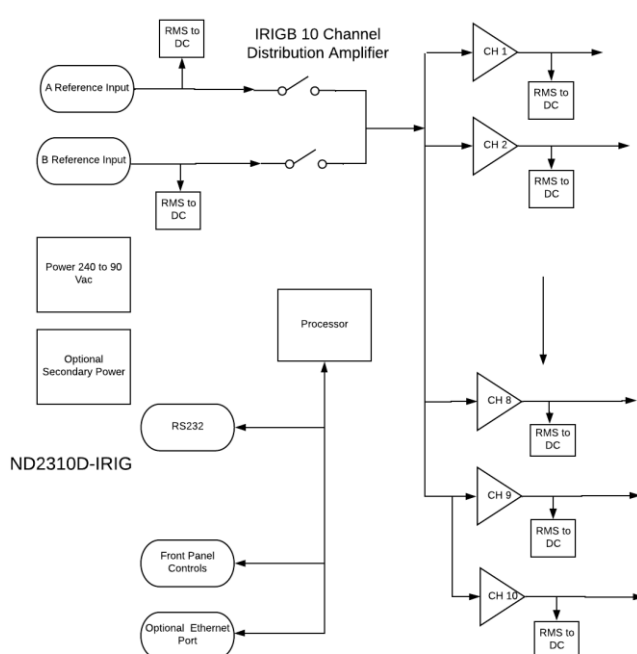

Networking

SNMP option

Transient and Fault Protected

Wide Frequency Range

1 to 100kHz

Dual Source

Dual sources inputs and unit selects valid input

All channels are monitored for a fault condition and built in test monitors critical circuits which drives panel indicators as well as alarm relay that can be wired into an alarm panel. Dual source inputs, unit measures input amplitude .

Technical Specifications

Output	Up to +-6 volt, 1 kHz to 100 kHz Gain = 1 +-5%, 50 Ohms
Connectors	Available BNC or SMA
Remote interface & control	
Protocol	RS232 NMEA-0183
Connector	DB-9
Location	Rear panel
Protocol	Bit plus stop
Standard Baud Rates	Selectable 4800, 9600, 19200, 38400, 57600 or 115200 bps
SNMP (option)	
Remote monitoring & control	Internet
Parameters monitored Locally – present on remote interface for monitoring	Output amplitude, all power supplies, Built-In test status,
Transaction/decodable commands	English format
Single monitoring command	Updated every second
Connector	RJ-45
Front Panel Display	Four line display, output status, input pulse amplitude and pulse width
Input	SMA or BNC
	Input impedance 50 or 1000 Ohms factory configurable
	Max 6 volts peak
	1 to 100kHz
Remote interface & control	
Protocol	RS232 NMEA-0183
Connector	DB-9
Location	Rear panel
Protocol	Bit plus stop
Standard Baud Rates	Selectable 4800, 9600, 19200, 38400, 57600 or 115200 bps
Power	
AC	Global AC power 90 to 250 VAC, 50/60hz, less than 10 watts
DC	Optional DC power – primary or back-up

Environmental and Mechanical

Operating temperature	0 to 50C non-condensing	
Storage temperature	-40 to 70C	
Height	1RU (~1.73)	
Width	19 inch	
Depth	12 inch	
AC input	90 to 250 VAC, 50/60hz, less than 10 watts (DC power options available)	
Weight	≈5.5lbs	

This document is copyright © July 22, 2022 Novus Power Products LLC. All rights reserved. This document is provided for information purposes only; contents are subject to change without notice. It is not warranted to be error-free, nor subject to any other warranties or conditions including implied warranties and conditions of merchantability or fitness for a particular purpose.