


DATA SHEET	NR3700-O
REVISION	D
DATE	081622

NR3700-O

10MHz Frequency Reference, OCXO, w/Band Gap Reference, Mini Chassis

KEY FEATURES

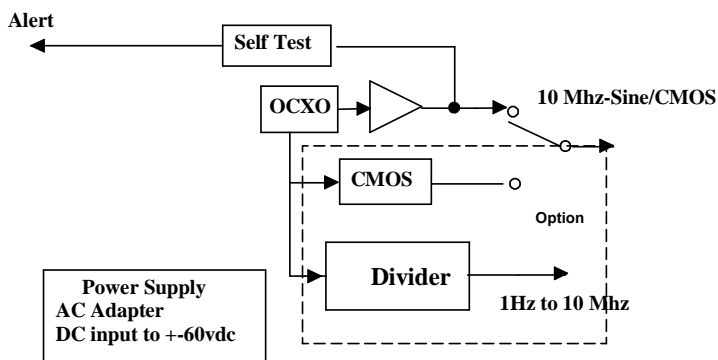

The heart of the unit is a low phase noise SC cut crystal. The OCXO is a SC (stress compensated) crystal placed in an oven that is operated at ~10°C above the maximum specified temperature. The SC cut has more than a five times improvement in thermal stability and a much lower mechanical sensitivity than an AT cut crystal.

There is built-in-test that drives an LED and relay contacts for system integration. The unit also has a frequency synthesizer that is factory-configurable from sub 1 Hz to 10MHz. 1 Hz or PPS a popular configuration.

The NR3700-O is nominally powered from 12 VDC but can operate from -60 to +60 VDC in three power ranges (range specified at ordering). There is also an AC power adapter available. Compact package of 4.0" x 1.2" x 2.75" (3.5" with mounting flanges). Optional transformer coupling for Galvanic-isolation available.

Product Highlights



Oven Stabilized Crystal

The OCXO provides temperature stability of 10 ppb. First year aging stability of 50ppb.

Typical Phase Noise

Offset (Hz)	dBc / Hz
10	-120
100	-140
1K	-150
10K	-150

Lower phase noise options available.

Low-Cost

Compact size lowers cost.

Frequency Synthesizer

Factory configurable frequency synthesizer

DATA SHEET	NR3700-O
REVISION	D
DATE	081622

Technical Specifications

Output	10 MHz, 0.4 ±0.1 Vrms, into 50 Ohms
Ship frequency accuracy	±20 ppb (24 hours)
First year frequency stability	±50 ppb
Temperature stability	±10 ppb
Power requirements	Standard configuration is 12 VDC (9 to 15 VDC) Options- ±24VDC (20 to 30 VDC), ±48 VDC (40 to 60 VDC) AC Adapter available 100 to 240VAC, 50/60Hz Power 5 W peak during warm-up, 3W normal operating (special crystals may require different power). Power isolation exceeds 200 VAC
Connectors	4-pin power con - power in, status relay connector- Digikey 277-2418-ND (mate provided with unit) For AC adapter use: the adapter comes with a threaded connector
Status relay	±20 VDC, 20 mA max. (normally closed)

Environmental and Mechanical

Operating temperature	0 to 50°C non-condensing (extended temperature range available)
Storage temperature	-40 to 70°C
Width	3.5" (with flange)
Depth	4.0" (exclusive of connectors)
Height	1.2"
Weight	~8 oz

This document is copyright © August 16, 2022 Novus Power Products LLC. All rights reserved. This document is provided for information purposes only; contents are subject to change without notice. It is not warranted to be error-free, nor subject to any other warranties or conditions including implied warranties and conditions of merchantability or fitness for a particular purpose.