


DATA SHEET NUMBER	NR8403-ROG
REVISION	C
DATE	050423

NR8403-ROG

Three Channel GNSS Locked Low Noise Rubidium Reference

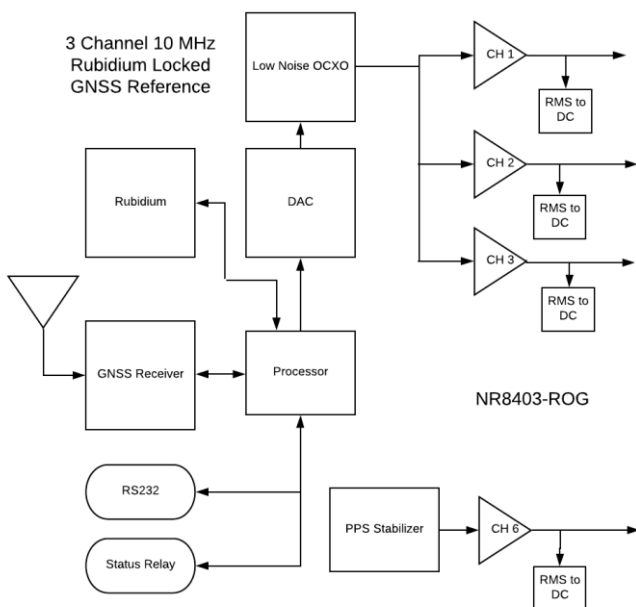

Rubidium Based Reference

Aging <<±5E-11 monthly

Phase Noise

Offset Frequency (Hz)	Typical (dBc / Hz)
10	-110
100	-150
1K	-15
10K	-155

This reference brings exceptional stability in an economical package. There are three 10 MHz outputs plus a PPS and NMEA. External locking options allows the unit to be locked to an external PPS or 10 MHz reference. The unit is available as a 10 MHz reference or 50 MHz.

DATA SHEET NUMBER	NR8403-ROG
REVISION	C
DATE	050423

Output	10 MHz, 0.4 Vrms ±0.1, into 50 Ohms	
Harmonic Distortion	< -30 dBc	
Power	DC options and AC power adapter available- < 15 W start, < 10 W steady state	
Alert	20Vdc/Vac, 0.1 Amp relay contacts- relay closed for normal condition, BNC	
Warm-up time	<15 minutes	
Time of lock	<5 min -130 dBm	
GPS Disciplining	GNSS receiver	
Time for valid output	<12 minutes	
Frequency Accuracy	<1E-10	
Stability: Allan Deviation		
1s	<3E-10	
10s	<1E-10	
100s	<3E-11	
SSB Phase noise for 10Mhz		
	Standard	Low Noise Option
10Hz	-110dBc	
100Hz	<150dBc	
1000Hz	<-155dBc	
10000Hz	<-160dBc	
Harmonic	<40dBc	
Non-Harmonic	<-80dBc	
Rubidium Atomic		
Accuracy at shipment	+/-1.0E-10	
Warm-up time	<15 minutes	
Time of lock	<5 min -130 dBm	
Time to achieve accuracy	<±1E-9<20 minutes	
Aging - monthly	<±5E-11	
Retrace	<±1E-10 after 1 hour	

DATA SHEET NUMBER	NR8403-ROG
REVISION	C
DATE	050423

PPS	
Amplitude for 1PPS	3.3 Vdc CMOS (5 Vdc option)
Pulse width for 1PPS	Programmable 1 to 500ms in 1 ms steps
Rise time for 1PPS	<5 ns (faster edge available)
Connector	BNC
Load Impedance	50 Ohm
Location	rear
Remote interface & control	
Protocol	RS232 NMEA-0183
Connector	DB-9
Location	Rear panel
Protocol	Bit plus stop
Standard Baud Rates	Selectable 4800, 9600, 19200, 38400, 57600 or 115200 bps
GNSS receiver	
	GPS L1 C/A, GLONASS L1OF, QZSS L1 C/A, SBAS L1 C/A (Ready): Galileo E1B/E1C, QZSS L1S
Channels	26 channels (GPS, GLONASS, QZSS, SBAS)
Sensitivity	
GPS	Tracking: -161 dBm
	Hot Start: -161 dBm
	Warm Start: -147 dBm
	Cold Start: -147 dBm
	Reacquisition: -161 dBm
GLONASS	
	Tracking: -157 dBm
	Hot Start: -157 dBm
	Warm Start: -143 dBm
	Cold Start: -143 dBm
	Reacquisition: -157 dBm
	With Novus recommended antenna
Antenna with LNA	
Antenna power	3.5 Vdc, < 35 ma (on center conductor) (factory configurable to 5 Vdc)
Frequency	1574-1607 MHz
Nominal Gain	2 dBic
Amplifier gain	26 dB
Noise Figure	< 2.0 dB
Out of Band rejection	Fo±50MHz=60 dBc, Fo±60 MHz
DC current	<25 ma@3.5 Vdc



DATA SHEET NUMBER	NR8403-ROG
REVISION	C
DATE	050423

Main Power		
DC input	-60 to +60 in three ranges	
Power	<6 W (steady state < 10 W)	
Warranty	1 year	

Environmental and Mechanical

Operating Temperature	0 to 50°C non-condensing
Storage Temperature	-40 to 70°C
Height	1.58"
Width	6"
Depth	6" exclusive of connectors
Weight	1.5 lbs

This document is copyright © May 4, 2023 Novus Power Products LLC. All rights reserved. This document is provided for information purposes only; contents are subject to change without notice. It is not warranted to be error-free, nor subject to any other warranties or conditions including implied warranties and conditions of merchantability or fitness for a particular purpose.