
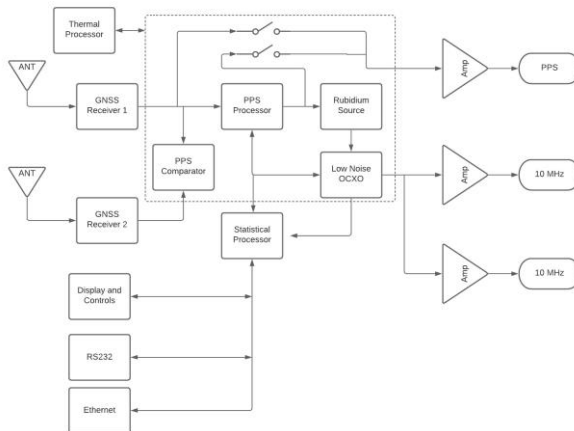


Company Datasheet #	NR9000 Kronos1
Revision #:	D
Date:	030422

# NR9000-Kronos1

## High Stability 10MHz 10 Channel GNSS Locked, Low Noise Rubidium Reference with Networking

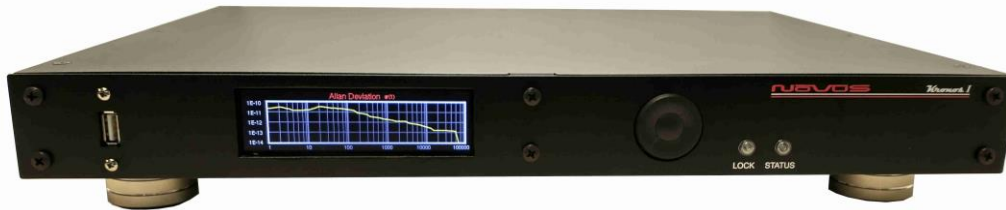

10 Channel GNSS locked reference featuring high stability. The entire timing assembly is in a thermally isolated case operating at a constant temperature. Thermal gradients are minimized and component variation with temperature are dramatically reduced. The unit also features a PPS source with a standard deviation of under 5 ns.. In addition to output amplitudes and internal critical measurements, the unit reports a continuous calculation of Allan Deviation. Various phase noise options are available. requirements. Dual power source options for AC and DC power. Data Logging of performance

### Networking

SNMP option

### Standard Phase Noise

Offset Frequency (Hz)	Typical (dBc / Hz)
10	-130
100	-150
1K	-155
10k	-160

### High Stability

Allan deviation E-13  
PPS Jitter < 5ns @ 1 sigma

Company Datasheet #	NR9000 Kronos1
Revision #:	D
Date:	030422

## Technical Specifications

Output	10 MHz, 1.0 Vrms $\pm 0.2$ , into 50 Ohms, 10 channels, Sine
Harmonic Distortion	< -30 dBc
<b>Rubidium Atomic</b>	
Accuracy at shipment	$\pm 5.0 \times 10^{-11}$
Warm-up time	< 15 minutes
Time of lock	< 5 min -130 dBm
Time to achieve accuracy	$< \pm 1 \times 10^{-9}$ < 20 minutes
Aging - monthly	$< \pm 5 \times 10^{-11}$
Retrace	$< \pm 1 \times 10^{-10}$ after 1 hour
<b>PPS</b>	
Amplitude for 1PPS	3.3 Vdc CMOS (5 Vdc option) $\pm 100$ ma
Pulse width for 1PPS	Programmable 1 to 500ms in 1 ms steps
Rise time for 1PPS	< 2ns (typical < 1 ns)
Jitter	GNSS-PPS < 10ns
Connector	SMA
Load Impedance	50 Ohm
Location	rear
Typical Allan Deviation	
1	4E-12
10	6E-12
100	3E-12
1000	2E-12
10000	3E-13
100k	9E-14
Standard Phase Noise	
1 Hz	-105
10 Hz	-130
100 Hz	-155
1000 Hz	-160
<b>Remote interface &amp; control</b>	
Protocol	RS232 NMEA-0183
Connector	DB-9
Location	Rear panel
Protocol	Bit plus stop
Standard Baud Rates	Selectable 4800, 9600, 19200, 38400, 57600 or 115200 bps

Company Datasheet #	NR9000 Kronos1
Revision #:	D
Date:	030422

<b>SNMP (option)</b>		
Remote monitoring & control	Internet	
Parameters monitored Locally – present on remote interface for monitoring	Output amplitude, all power supplies, GNSS lock status, number of satellites, Built-In test status,	
Transaction/decodable commands	English format	
Single monitoring command	Updated every second	
Connector	RJ-11	
<b>GNSS receiver</b>		
Cold Start Acquisition	GPS, BeiDou, Galileo, and GLONASS reception < 30 seconds	
<b>Sensitivity</b>		
Tracking	-167 dBm	
Reacquisition	-160 dBm	
Cold Start	-148 dBm	
Hot Start	-157 dBm	
<b>Signals Supported</b>		
GPS	L1C/A (1575.42 MHz), L2C (1227.60 MHz)	
GLONASS	L1OF (1602 MHz + k*562.5 kHz, k = -7,..., 5, 6), L2OF (1246 MHz + k*437.5 kHz, k = -7,..., 5, 6)	
Galileo	E1-B/C (1575.42 MHz), E5b (1207.140 MHz)	
BeiDou	B1I (1561.098 MHz), B2I (1207.140 MHz)	
<b>Antenna with LNA</b>		
	184 channel receiver	
	L-1 Band	L2/ESb/B2i Band
Frequency	1559-1606	1197-1249 MHz
Impedance	50 Ohm	50 Ohm
Gain	Typ 3.5 dBic (Zenith)	Typ 0 to 2 dBic (Zenith)
Axial Rotation	Max 2 dB (Zenith)	Max 2 dB (Zenith)
Polarization	RHCP	RHCP
LNA Gain	Typ 28 +-3 dB	28 +- 3 dB
LNA Noise Figure	Max 2.8 dB	Max 3.2 dB
Output VSWR	Max 2.0	Max 2.0 dB
Cable Insertion Loss	Typ 6.6 dB	Typ 6.6 dB

### Environmental and Mechanical



<b>Company Datasheet #</b>	NR9000 Kronos1
<b>Revision #:</b>	D
<b>Date:</b>	030422

Operating temperature	0 to 50C non-condensing	
Storage temperature	-40 to 70C	
Height	1RU (~1.73)	
<b>Width</b>	19 inch	
Depth	12 inch	
AC input	90 to 250 VAC, 50/60hz, less than 10 watts	
<b>Weight</b>	≈5.5lbs	

This document is copyright © March 4, 2024 Novus Power Products LLC. All rights reserved. This document is provided for information purposes only; contents are subject to change without notice. It is not warranted to be error-free, nor subject to any other warranties or conditions including implied warranties and conditions of merchantability or fitness for a particular purpose.