

# NS8004-PTP-SyncE

## Product Specification GNSS Locked PTP-SyncE Server and Timing Reference



Small 92mmX120mmX27mm form factor GNSS-locked reference provides accurate timing over direct and network connections.

2 digital outputs are user selectable between IRIG-B and PPS.

2 analog outputs are user selectable between PPS, low phase noise 10MHz sine, and a configurable square wave frequency between 10Hz and 50MHz.

### Key Features:

- PTP/SyncE Server or Client
- Small 92mmX120mmX27mm form factor
- +/-25ns sync accuracy
- IRIG-B DCLS
- IRIG AM
- Have Quick
- 10Hz – 50MHz square wave
- PPS
- 10MHz sine
- LVTTTL
- LVDS
- DC powered (9-48 VDC)



## Technical Specifications

<b>Analog Signal</b>	
Number of Outputs	2
Signal Options	10MHz (Low Phase Noise), PPS, 10Hz-50MHz Square Wave, IRIG AM, Have Quick
Load Impedance	50 Ohms
Connector	SMA
<b>10MHz Output</b>	
Amplitude	1 VRMS ±0.2
Locked stability	5E-11
First year frequency stability	+/-40 ppb (unlocked)
Temperature stability	+/-100 ppb (unlocked)
<b>10.0 MHz Phase Noise (dBc/Hz)</b>	
1 Hz	-60
10 Hz	-90
100 Hz	-100
1 kHz	-120
10 kHz	-130
100 kHz	-140
<b>PPS Output</b>	
Amplitude	3.3 VDC CMOS
Accuracy	50ns RMS
Pulse width	Programmable 1 to 500ms in 1 µsec steps
Rise time	<5 ns
<b>10Hz-50MHz Square Wave</b>	
Amplitude	3.3 VDC CMOS

<b>Digital Signals</b>	
Number of Outputs	2
Signal Options	PPS, IRIG-B DCLS, 10Hz – 50MHz Square Wave, LVTTTL, LVDS
Load Impedance	1k Ohm
Connector	Keyed 4 pin connector
<b>PPS</b>	
Amplitude	3.3 VDC CMOS
Accuracy	50ns RMS
<b>IRIG-B</b>	
Output	3.3V DCLS
Format	Enabled/Disable: Year, SBS, or IEEE1344 bits

### PTP/SyncE

Version	PTP profiles: PTP standard and its associated power profile specific parameters. IEEE C37.238-2017 and IEC/IEEE 61850-9-3 2016. SyncE ITU-T 8264
Accuracy	+/- 25ns

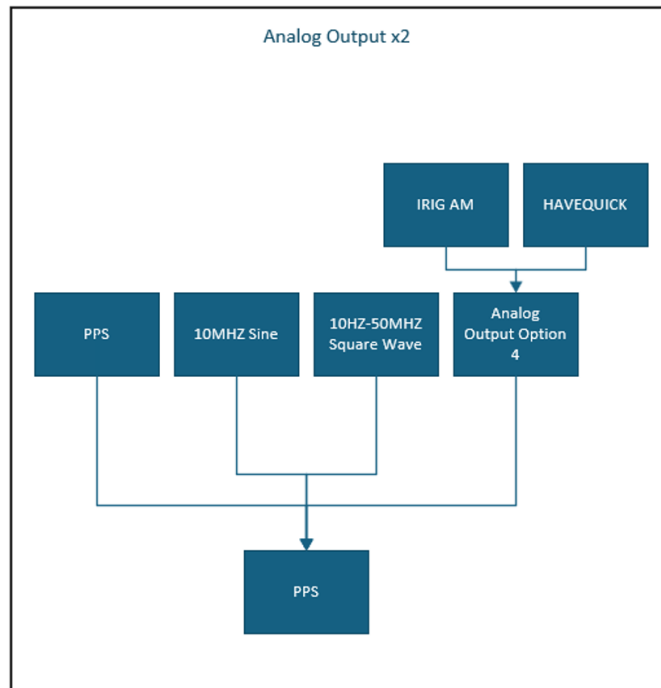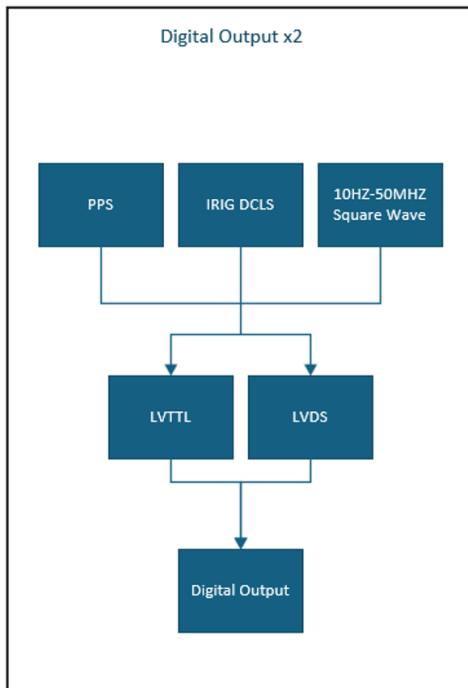

GNSS Receiver	
Number of Channels	72
Cold Start Acquisition	<30 seconds
Receiver Sensitives(dBm)	
Tracking	-167
Reacquisition	-160
Cold Start	-148
Hot Start	-157
Supported Signals	
GPS	L1C/A
GLONASS	L1OF
Galileo	E1-B/C
BeiDou	B1I

**Antenna**

Supply Voltage	5V
----------------	----

**Front panel Indicators and Control**

Status Indicator LEDs	LEDs indicate GNSS lock and NTP operation
-----------------------	---

**Remote interface**

Rear Panel Serial Port	USB mini-B to serial interface for system status and system configuration 115200 baud default
------------------------	---

Standard Serial Baud Rates	Selectable baud rate 19200, 38400, 57600 or 115200 (default), 8 data bits, 1 stop bit, no parity, no flow control
----------------------------	---

Network Connectivity	Ethernet: 10/100MB RJ-45 Rear panel
----------------------	-------------------------------------

**Power**

DC input	+/- 9-48VDC 10W
----------	-----------------


**Environmental and Mechanical**

**Mechanical**

Height	1.13" (28.68mm)
Width	3.5" (88.90mm)
Depth	5.57" (141.49mm)
Weight	1.0 lb.

**Environmental**

Operating temperature	-10 to 65°C
Storage temperature	-40 to 70°C
Humidity	0% - 90% RH non-condensing
Agency Certifications	UL / FCC Part 15
EU compliance	RoHS, REACH, WEEE
EMC Compliance Emissions/Immunity	CISPR 32 Emissions CISPR 35 Immunity IEC 61000-4-2 ESD IEC 61000-4-3 Radiated IEC 61000-4-4 Transient/burst immunity IEC 61000-4-5 Surge immunity IEC 61000-4-6 Immunity to conducted
Safety	UL 62368-1

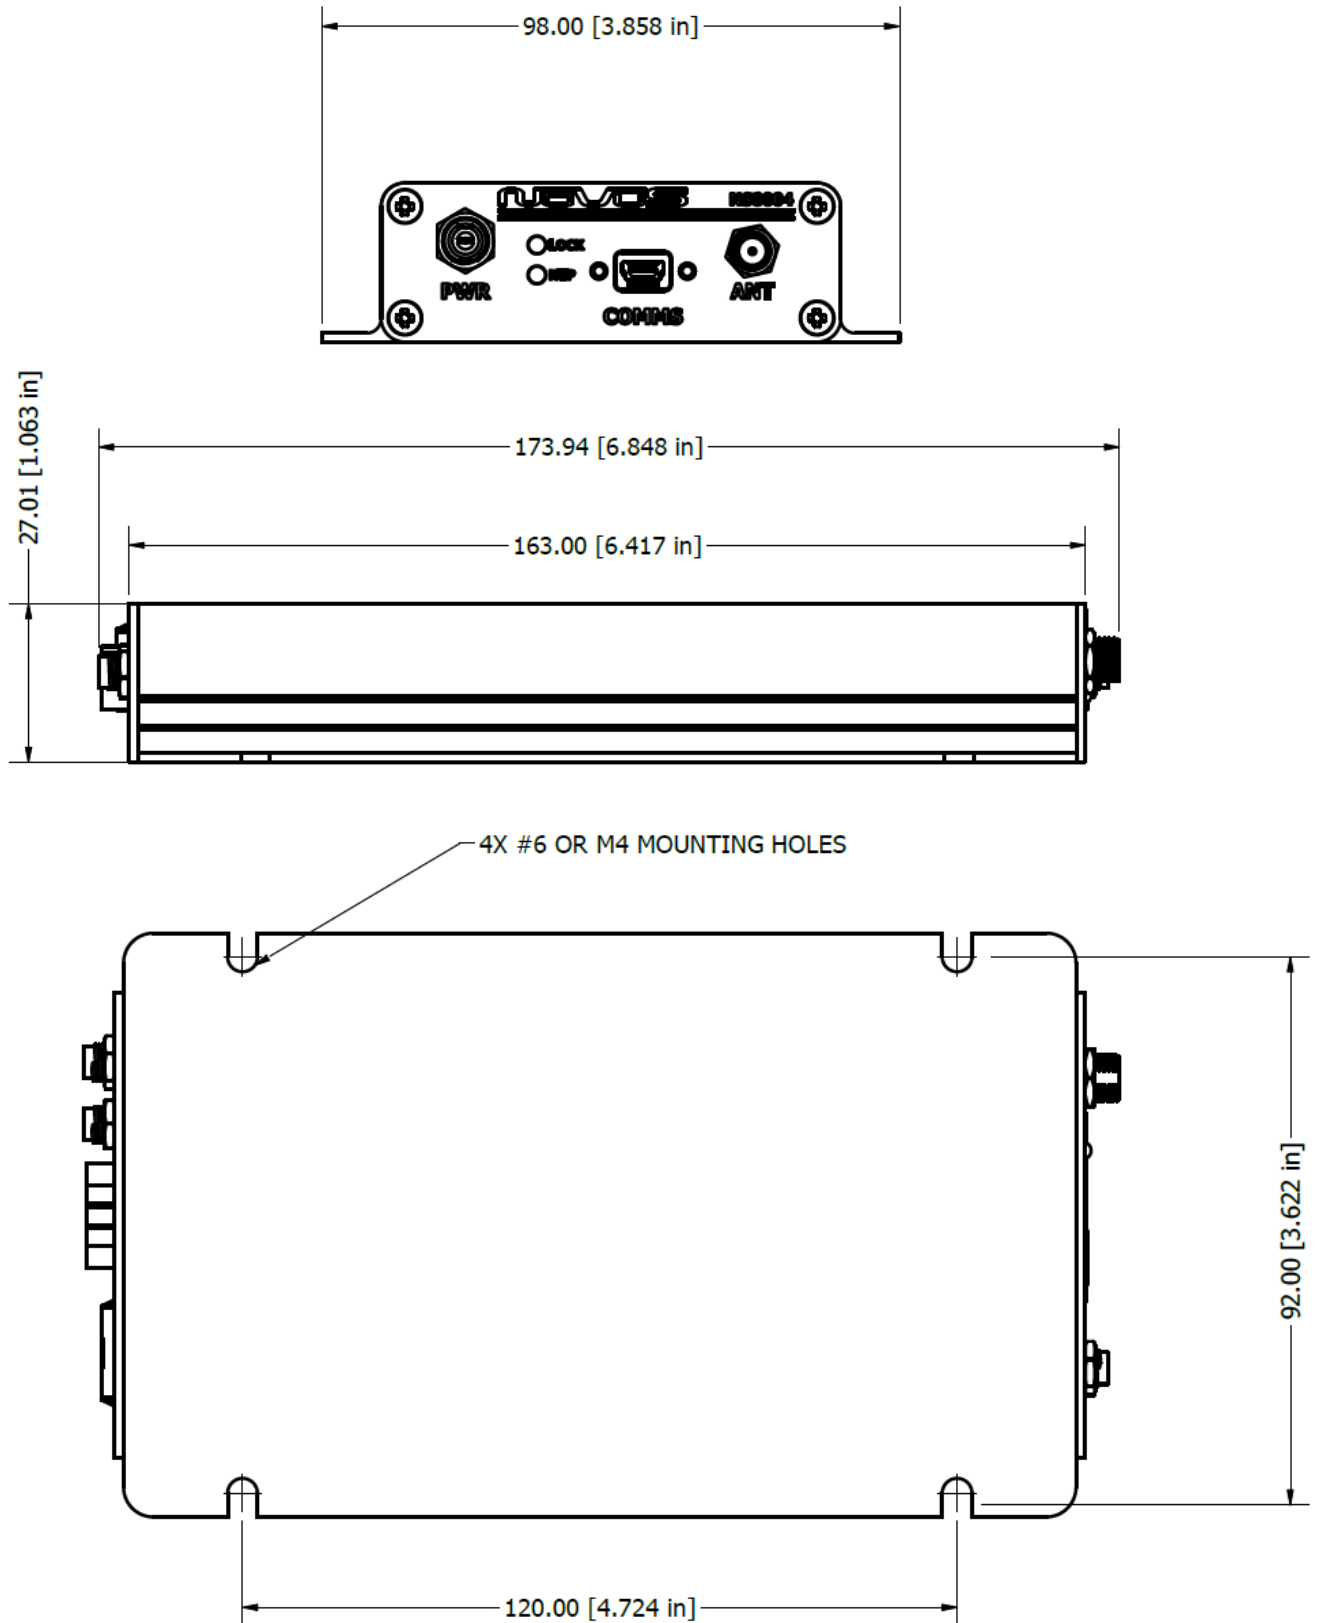

Network Timing Services

PTP v2 – [IEEE 1588™-2019](#) Master Precision Time Protocol (PTP), Slave, E2E, IPv4/v6, Multicast, Unicast, Hybrid (both).

PTP profiles: PTP standard and its associated power profile specific parameters.

[IEEE C37.238-2017](#) and [IEC/IEEE 61850-9-3 2016](#).

SyncE ITU-T 8264

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

- (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

**Revision History**

Date	Nature of Changes	Approved By
260210	Initial release.	Ethan Bozarth
260506	Added outputs, signals, block diagram, copy	Daniel Longo
260611	Updated models and dimensions	Daniel Longo

All information provided herein is the property of Novus Power Products LLC. The information included may be reproduced for the purpose of operating the Novus equipment. Subject to change. This document is copyright © 2025 - 2026 Novus Power Products LLC. All rights reserved.